

THE SHELL ROTELLA® HEAVY-DUTY ENGINE ANTIFREEZE/COOLANT PRODUCT PORTFOLIO



COMPLETE PROTECTION FOR YOUR HEAVY-DUTY ENGINE

The **Shell ROTELLA®** family of heavy-duty motor oils and coolants are formulated to provide high-performance protection for today's heavy-duty diesel engines.

The Shell ROTELLA® brand is excited to offer a complete product line of extended life coolants (ELC) and Fully Formulated engine coolant, designed to deliver:

- **Protection against overheating** – Excellent heat transfer properties allow heat to transfer more effectively, protect against freezing and boil-over and help keep engines running cool
- **Corrosion protection** – Corrosion inhibitor technology protects metals against all forms of corrosion
- **Maintenance savings** – Technology helps extend coolant life and prolong the life of seals, hoses and other cooling system components – helping reduce overall maintenance costs

ELCs are designed to go 600,000 on-highway miles (and beyond with proper monitoring) and provide overall reduction in cooling system maintenance. ELCs also offer complete cooling system component protection by helping to reduce water-pump failures, hard-water-scale deposits and silicate gel (the green goo you sometimes see). We understand consumers' challenges and have designed a product portfolio to help make maintenance needs easier.

Our most advanced coolants, Shell ROTELLA Ultra ELC™ and Shell ROTELLA ELC™ Nitrite-Free are formulated to meet more severe operational conditions of modern, hotter-running engines. This is particularly important for new emission engines, especially those with EGR.




PRODUCT FEATURES AND BENEFITS

Today's modern engines demand effective heat transfer, freeze and boiling protection and corrosion protection for the cooling system. Shell ROTELLA® extended life coolants and Fully Formulated coolants satisfy these requirements.

HOW SHELL ROTELLA® COOLANTS COMPARE TO EACH OTHER				
SHELL ROTELLA® COOLANT BENEFITS	SHELL ROTELLA® ULTRA ELC™	SHELL ROTELLA® ELC NITRITE FREE	SHELL ROTELLA® ELC	SHELL ROTELLA® FULLY FORMULATED WITH SCAS*
RELATIVE PROTECTION AGAINST FREEZE AND OVERHEATING				
Freeze and boil-over protection	★ ★ ★	★ ★ ★	★ ★ ★	★ ★ ★
Heat transfer	★ ★ ★	★ ★ ★	★ ★ ★	★ ★ ☆
Anti-scaling properties	★ ★ ★	★ ★ ★	★ ★ ☆	★ ☆ ☆
PROTECTION OF ENGINE AND COOLING SYSTEM COMPONENTS FROM CORROSION				
Aluminum corrosion protection	★ ★ ★	★ ★ ★	★ ★ ☆	★ ☆ ☆
Copper/brass corrosion protection	★ ★ ★	★ ★ ★	★ ★ ☆	★ ☆ ☆
Oxidation – thermal stability	★ ★ ★	★ ★ ★	★ ★ ☆	★ ☆ ☆
Cylinder liner pitting corrosion protection	★ ★ ★	★ ★ ★	★ ★ ★	★ ★ ★
Compatible with elastomers and seals	★ ★ ★	★ ★ ★	★ ★ ☆	★ ★ ☆
Resistance to gel precipitate formation	★ ★ ★	★ ★ ★	★ ★ ★	★ ☆ ☆
HELPS REDUCE OVERALL MAINTENANCE COSTS				
Non-depleting inhibitors	★ ★ ★	★ ★ ★	★ ★ ☆	★ ☆ ☆
Maintenance (Testing, SCAs)	★ ★ ★	★ ★ ★	★ ★ ★	★ ☆ ☆
Service Life	★ ★ ★	★ ★ ★	★ ★ ★	★ ☆ ☆

* Cylinder liner protection maintained with addition of SCAs.

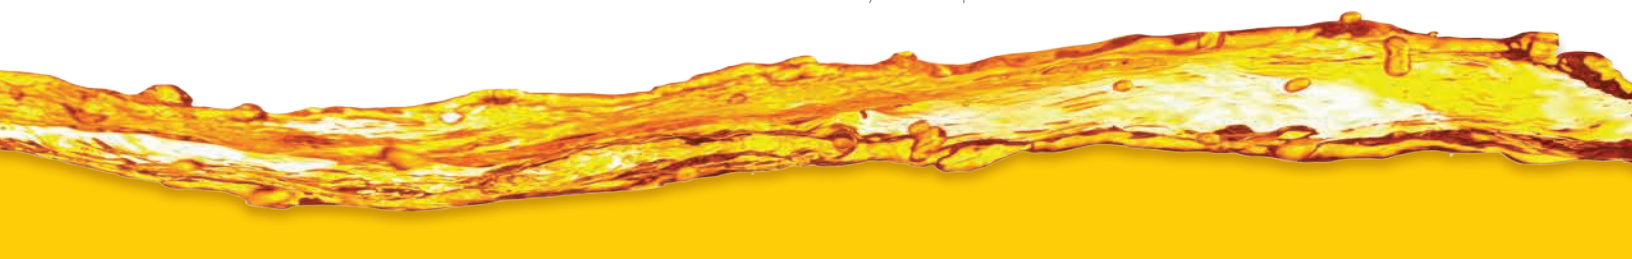

Shell ROTELLA® antifreeze/coolant family offers a complete line of heavy-duty coolants and complements the Shell ROTELLA® portfolio of high-performance engine oils. For questions please contact your sales representative.



Shell ROTELLA® ELC Nitrite Free extended-life coolant has demonstrated outstanding performance in protecting cylinder liners from pitting corrosion damage in 600,000+ mile field testing.



Cylinder liner of modern 1.5L diesel engine after 600,000+ miles on Shell ROTELLA® ELC Nitrite Free exceeds current industry standard for corrosion protection.



Cylinder liner showing pitting damage, meets current industry standard for corrosion protection.

WHICH SHELL ROTELLA® PRODUCT IS RIGHT FOR YOU?

EQUIPMENT	OEM SPECIFICATION/ PERFORMANCE LEVEL	SHELL ROTELLA ULTRA ELC™
CATERPILLAR	ELC – Nitrite-free applications	<ul style="list-style-type: none"> Advanced ELC nitrite-free engine coolant technology provides excellent protection against pitting corrosion damage that can result from the adverse reaction of the coolant and vibrating cylinder liner Service life is 600,000 miles/12,000 hours with no extender or SCAs required Advanced high-temperature corrosion protection Exceptional heat transfer and anti-scaling properties that prevent hard water mineral build-up Service life is 600,000 miles/12,000 hours with no extender or SCAs required Meets ASTM D3306, D4985, D6210 Excellent seal, elastomer and hose compatibility
CUMMINS	14439	
DAF MAT	74002	
DETROIT DIESEL	93K217	
FREIGHTLINER	48-22880	
MAN	324 Type SNF	
MERCEDES	DBL 7700/325.3	
MTU	MTL 5048	
NAVISTAR	MPAPS B1 – Type IIIa	
PACCAR	CS0185	
VOLVO/MACK		
EQUIPMENT	OEM SPECIFICATION/ PERFORMANCE LEVEL	SHELL ROTELLA® ELC NITRITE FREE
CUMMINS	14439	<ul style="list-style-type: none"> Proven Shell ROTELLA® ELC Nitrite Free Organic Additive Technology free of nitrites, silicates, phosphates, amines, and heavy metals Up to 600,000 miles or 12,000 hours of service life for commercial trucks with NO need for extenders or supplemental coolant additives (SCAs) Helps lower maintenance costs Meets ASTM D3306, D4985, D6210 Excellent heat transfer Mixed fleet performance (passenger cars to HD trucks) suitable for Ford WSS-M97B44-D and GM 6277M
DETROIT DIESEL	93K217	
NAVISTAR	MPAPS B-1, Type IIIa	
PACCAR		
VOLVO/MACK	TSI 184-001	
MTU	MTL 5048	
VERMEER		
EQUIPMENT	OEM SPECIFICATION/ PERFORMANCE LEVEL	SHELL ROTELLA® ELC
CATERPILLAR	EC-1	<ul style="list-style-type: none"> Proven Shell ROTELLA® ELC Organic Additive Technology free of phosphates and amines Up to 600,000 miles or 12,000 hours of service life with NO need for (SCAs). Extender added at 300,000 miles Excellent heat transfer Helps lower maintenance costs Meets ASTM D3306, D4985, D6210
CUMMINS	14439	
FREIGHTLINER	48-25961	
NAVISTAR	MPAPS B-1, Type III	
VOLVO/MACK		
SHELL ROTELLA® FULLY FORMULATED PRE-CHARGED WITH SCAS		
OFFERED FOR CUSTOMERS WANTING A FULLY FORMULATED COOLANT IN A WIDE VARIETY OF COMMERCIAL TRUCKS AND EQUIPMENT		<ul style="list-style-type: none"> Premium quality fully formulated coolant containing supplemental coolant additives (SCAs) to provide complete engine and cooling system protection Service life is typically 200,000–250,000 miles/2–3 years and requires monitoring and maintaining SCA additive levels Highly stabilized, low silicate formula reduces deposits Meets ASTM D3306, D4985, D6210

All coolants meet ASTM D3306/D6210 Our recommendations are based on industry and manufacturer trends. To learn more about our products, call our customer service technical support at 1-800-237-8645.